
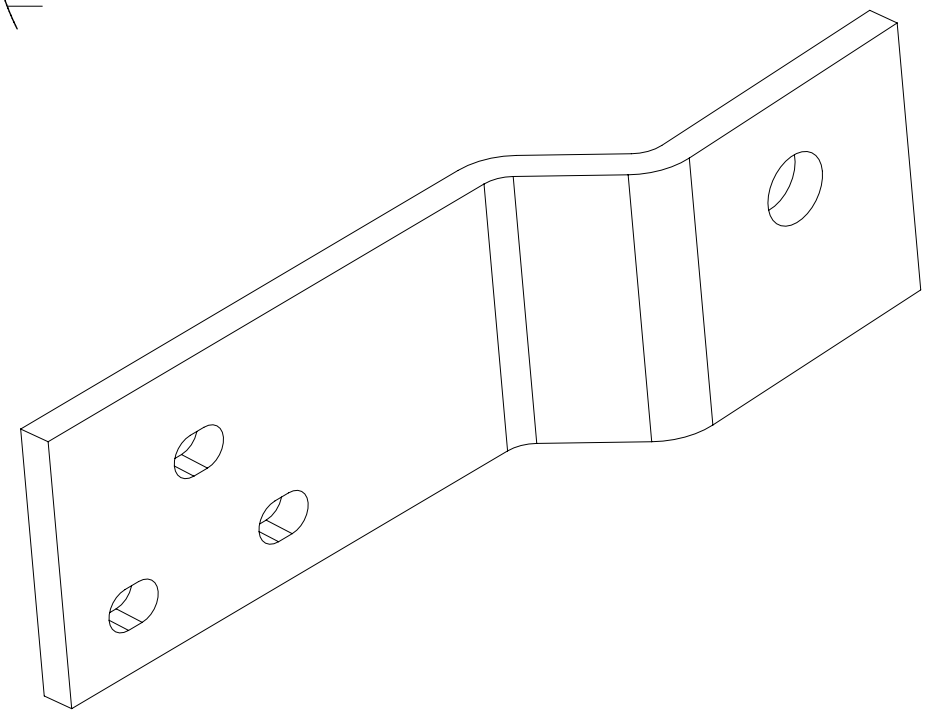
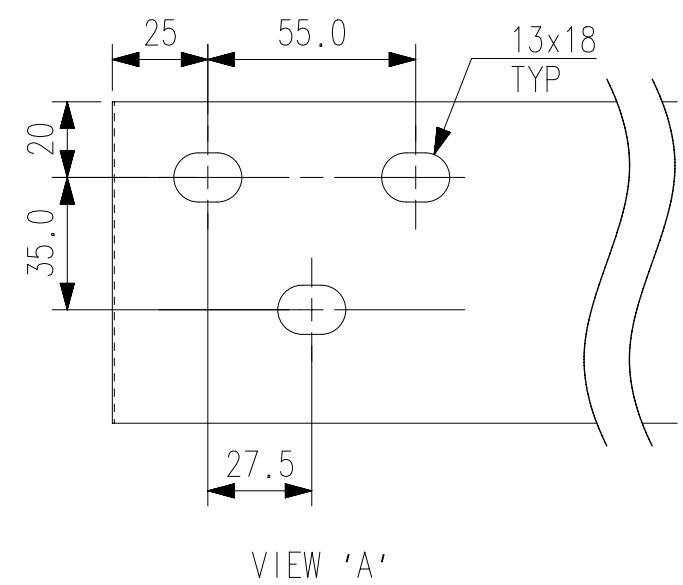


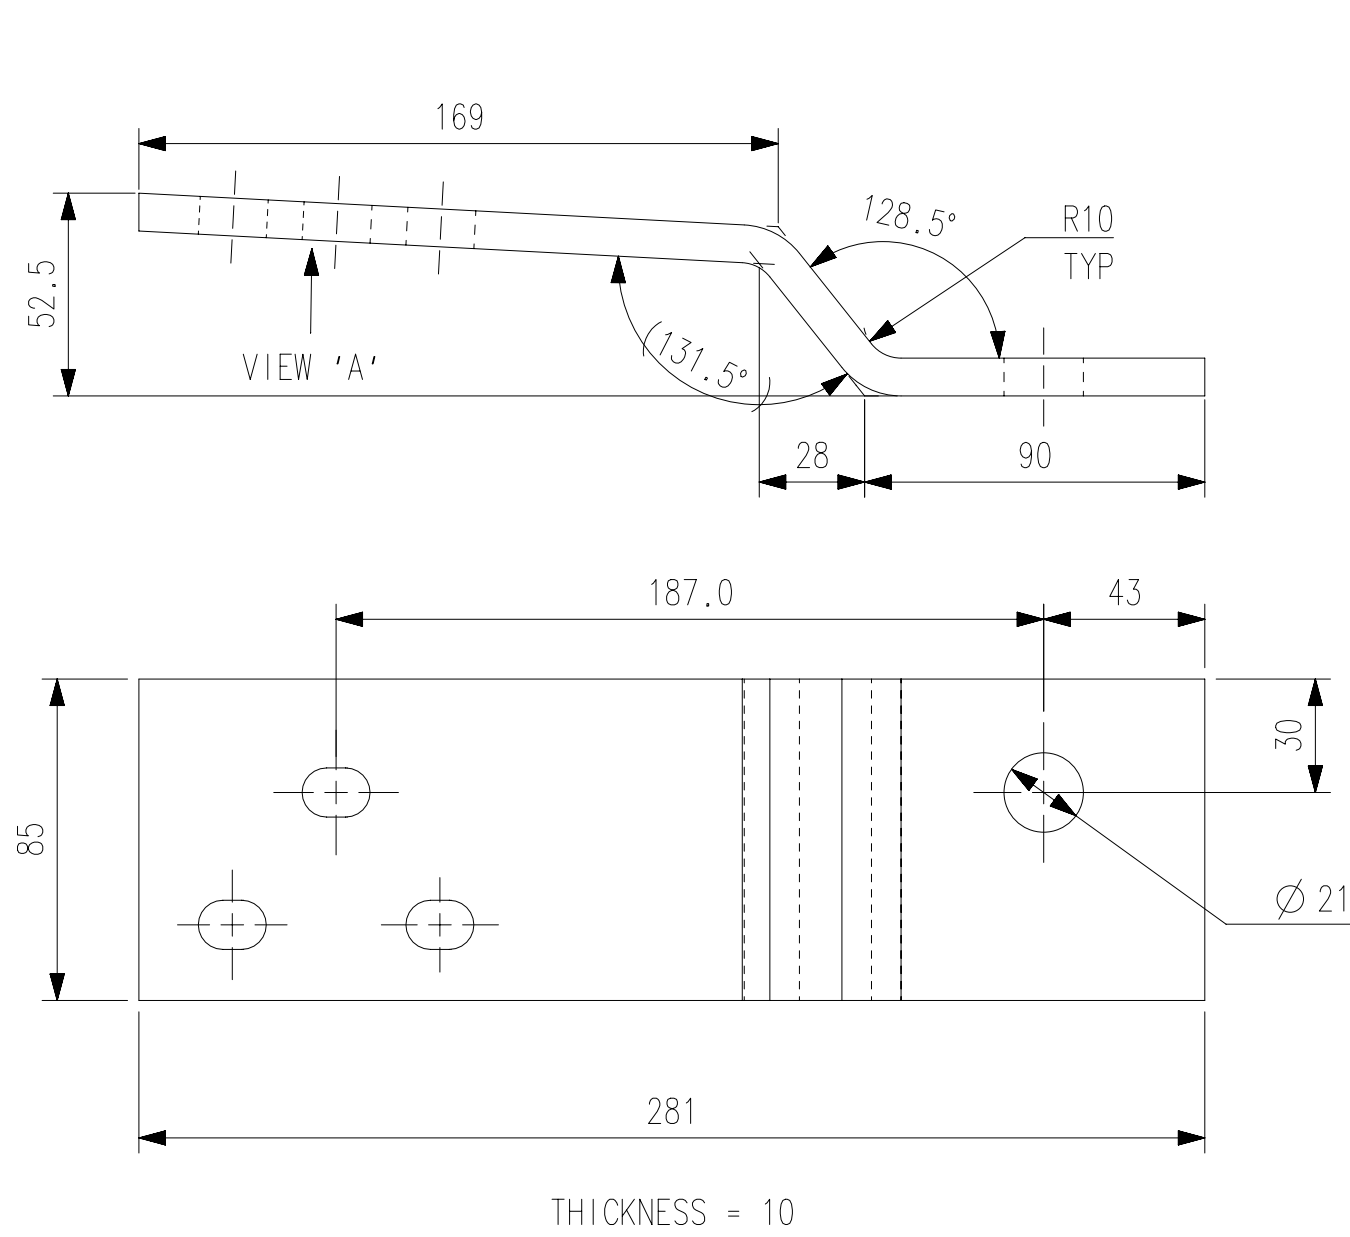

- NOTE :
1. REMOVE SHARP EDGES, CORNERS & BURRS
 2. PRIMING TO BE DONE AS PER PS 529 PROCEDURE 1
 3. APPROX TOTAL SURFACE AREA 58482 mm²
 4. DEVELOP LENGTH - 294 mm

ER15C0003377	AC		1. Production Release	KMS	KMS	SAB	22/12/15
ECN16P021125	AB		1. L2 Drawing release	KMS	KMS	SAB	31/07/15
ECN16P020781	AA		1 L1 Drawing release	KMS	KMS	SAB	05/06/15
E.R.NO.	LET	LOC	REVISIONS	DSNF	CKR.	APPR.	DATE

<SC> :SIGNIFICANT CHARACTERISTICS											▽:CRITICAL CHARACTERISTICS					
BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.							MAHINDRA & MAHINDRA LIMITED TRACTOR DIVISION KANDIVLI(EAST), MUMBAI 400 101, INDIA.									
UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989																
DIMENSIONS											E.R. / PROC.REQ.NO : ER15C0003377			PART NO. : 008006010U1/008006011U1		
LINEAR IN mm.		OVER UPTO	0.5 3	3 6	6 30	30 120	120 400	400 1000	1000 2000	2000 4000						
f	FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-	PART NAME : SUPPORT FOR WEIGHT MOUNTING BKT LH/RH					
m	MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2						
c	COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4						
v	VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8						
ANGULAR IN deg.		LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.									MATERIAL : E250C IS2062:2011			HEAT TREATMENT : -----		
		OVER	-	10	50	120	400									
		UPTO	10	50	120	400	-									
f	FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'									
m	MEDIUM (X.XX)															
c	COARSE (X.X)															
v	VERY COARSE (X)															
PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.																
COMPUTER GENERATED DRAWING					DO NOT CHANGE MANUALLY											
IF IN DOUBT, ASK			DO NOT SCALE			DRG SIZE :			ALL DIMENSIONS ARE IN mm.				CHECK DRG WITH LATEST CHANGE No			